


Compact Linear Position Sensors for Standard Applications

Tube- and Profile-Types up to 3 m stroke – LM_S34

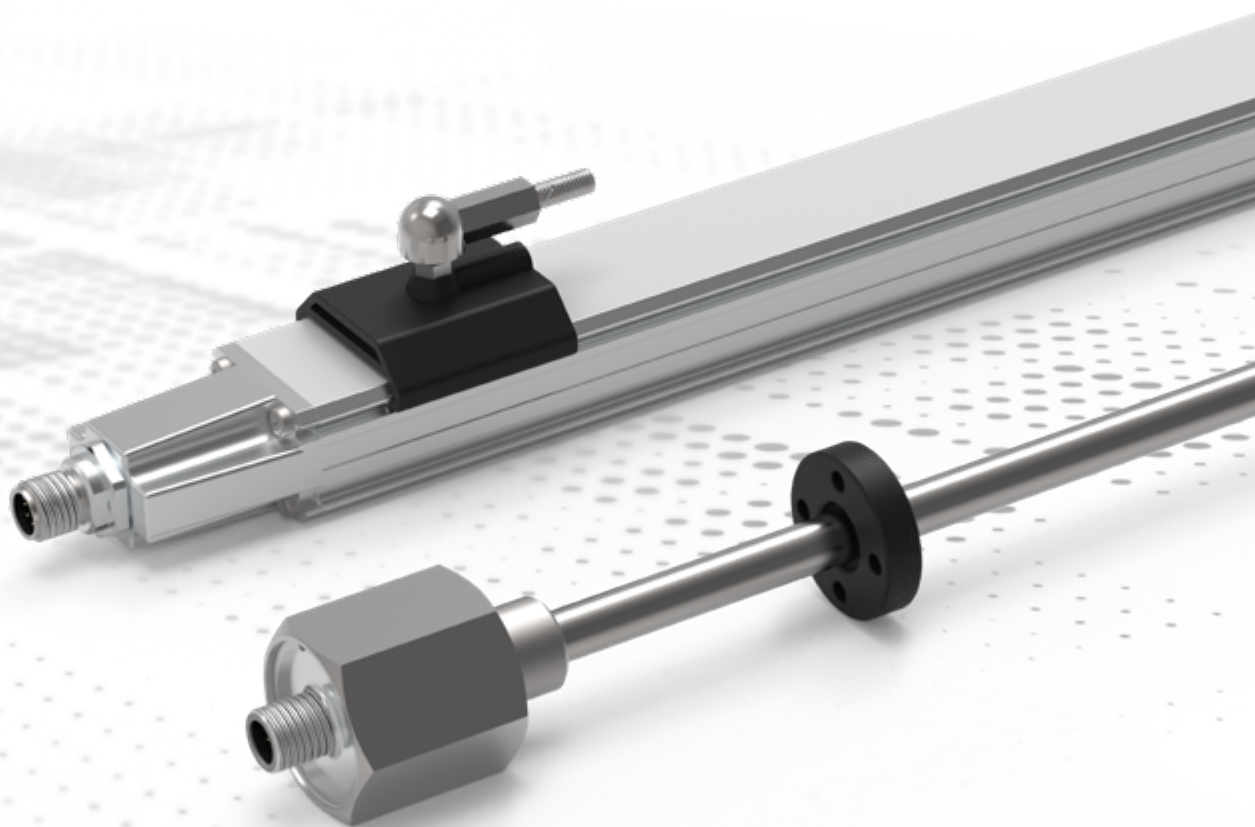

Release note

Please note that the information, measure values and tolerances in the drawings are not binding. Subject to Modification in technology and design. They serve only as a means to illustrate the product. Please contact our sales team if you would like a concrete offer and a binding drawing.

All information and data can be found at:
www.tr-electronic.com/s/S020952

Access information even faster:
by scanning the QR code.



Closing the gap for standard applications

Industrial

Linearity: $\pm 50 \mu\text{m}$ (@FS 1 m)
Resolution typ.: 0.001 mm
Measurement lengths: to 4,000 mm




Standard

Linearity: $\pm 0.15 \text{ mm}$ (bis 1.5 m FS)
Resolution typ.: 0.01 mm
Measurement lengths: to 3,000 mm



Basic

Linearity: 0.01 % (FS)
Resolution typ.: 0.1 mm
Measurement lengths: to 3,000 mm

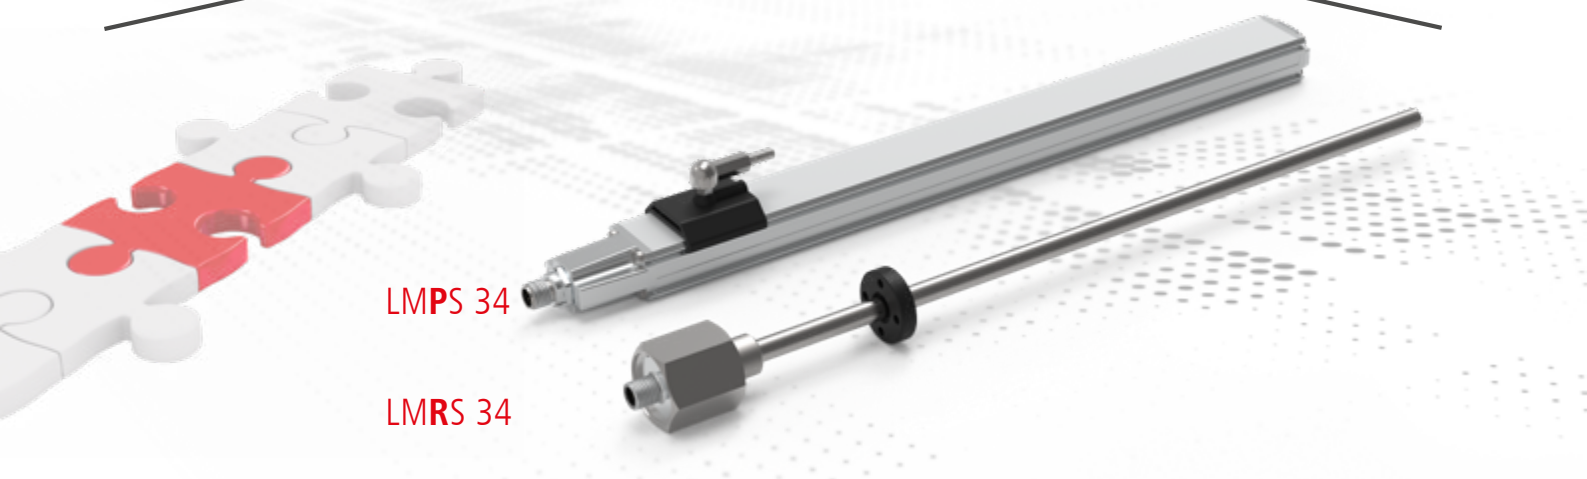

LMPS 34

LMRS 34

Advantages

- High level of machine availability: touch-free and wear-free measurement
- No machine initialization after a power failure: Linear absolute measurement
- Easy to install: clampable, flat profile housing
- Compatible even in restricted space: Compact design
- Simple to connect: economical M12 standard connectors for all interfaces

Additional features

- Optimal price-performance ration for many industrial applications
- Measurement lengths of 0.03 m to 3 m
- A wide range of magnets and magnet slides are available
- Resistant to vibration and fluctuations in temperature

Features

- Resolution typ: 0.01 mm
- Linearity: $\pm 0.15 \text{ mm}$
- Protected against water (up to IP 67)

Profile Housing

- Flat profile (construction height 34 mm)
- Can be used with guided magnet slider or unguided block magnets

Tube Housing

- pressure proof stainless steel tube for cylinder integration (300 bar static tested)

Applications

- General positioning in machine construction
- Replacement for existing measuring elements, e.g. wear-prone potentiometers
- Plastic spray machines
- Feed and dress axis

Magnetostriction – functional principle

Magnetostriction technology

The measuring principle is based on a travel time measurement (ultrasonic range). A protecting tube contains a tensioned magnetostrictive wire (waveguide), through which current pulses are transmitted. This generates a circular magnetic field around the wire. A non-contact permanent magnet serves as a position sensor, touching the waveguide with its magnetic field. The two differently aligned magnetic fields meet at the measuring point and trigger a torsion pulse, which moves along the wire in both directions at a constant sound velocity. The time difference between the emission of the torsion pulse and its arrival at the encoder in the sensor head is converted by the measuring electronics into a displacement-proportional signal, which is made


available as a digital or analog output signal.

The touch-free and wear-free measuring systems, which operate based on magnetostriction technology, are available in the following versions.

In an aluminium profile housing with externally attached measuring slide or loose magnet, managed by the operator.

Advantages

- _ touch-free and low on wear and tear
- _ precise and reliable position feedback
- _ for attachment to the machine

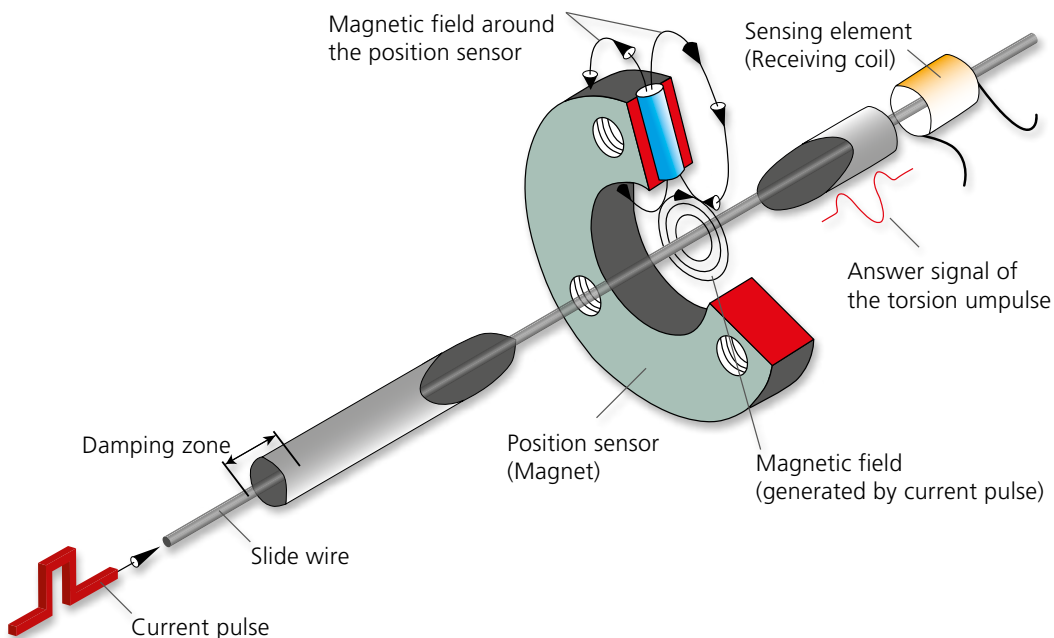

LMRS 34



Analog
SSI
CAN
IO-Link

Advantages

- _ pressure proof tube housing
- _ referencing via set input
- _ measures linear movements
- _ Wear-free scanning
- _ for cylinder integration


General Data

Supply	
_ Supply voltage	24 VDC, -20...+10 %
Measuring length, standard	50 ... 3.000 mm in steps
Resolution	0,01 mm
Linearity deviation	±0,015 % FS (min ±50 µm)
Reproducibility	±0,005 % FS (min ±10 µm)
Environmental conditions	
Relative humidity	98 %, non condensing
Protection class	
_ Standard	IP67
Magnet not included, please order separately.	
Options	ATEX Zone 2/22
Dimensional drawing	LMRS 34


More information about

the devices can be found at

www.tr-electronic.com/s/S020951

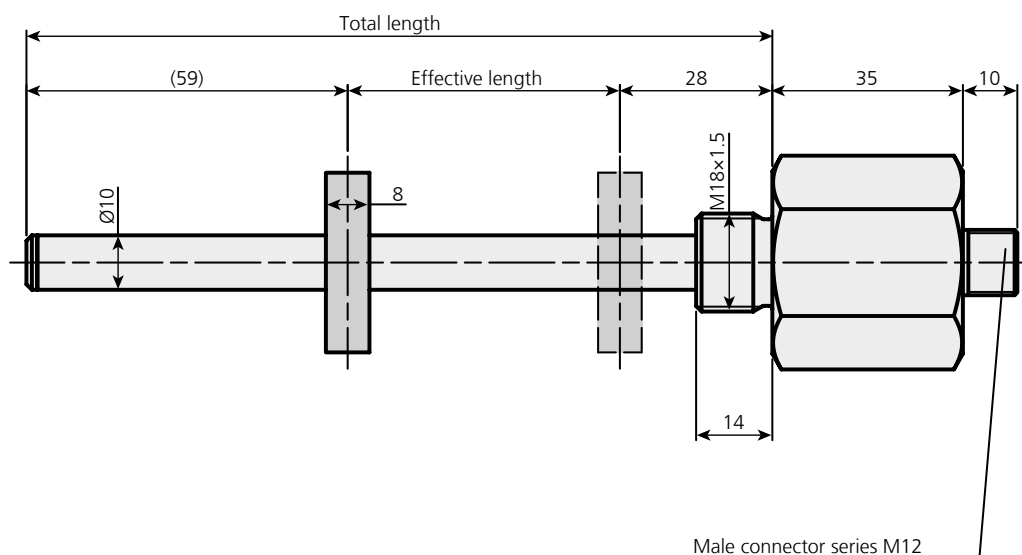

View without position sensor



Please ask for specific drawing for your construction work.
Gray: Not included, please order separately.

LMPS 34



**Analog
SSI
CAN
IO-Link**

Advantages

- Measures linear movement
- Profile housing
- Wear-free scanning
- Compact design

General Data

Supply	
— Supply voltage	24 VDC, -20...+10 %
Measuring length, standard	50 ... 3.000 mm in steps
Resolution	0,01 mm
Linearity deviation	$\pm 0,015$ % FS (min ± 50 μ m)
Reproducibility	$\pm 0,005$ % FS (min ± 10 μ m)

Environmental conditions

Relative humidity	98 %, non condensing
Protection class	
— Standard	IP 67


Magnet and double clamp not included, please order separately.

**More information about
the devices can be found at**

www.tr-electronic.com/s/S020951

Dimensional drawing

LMPS 34

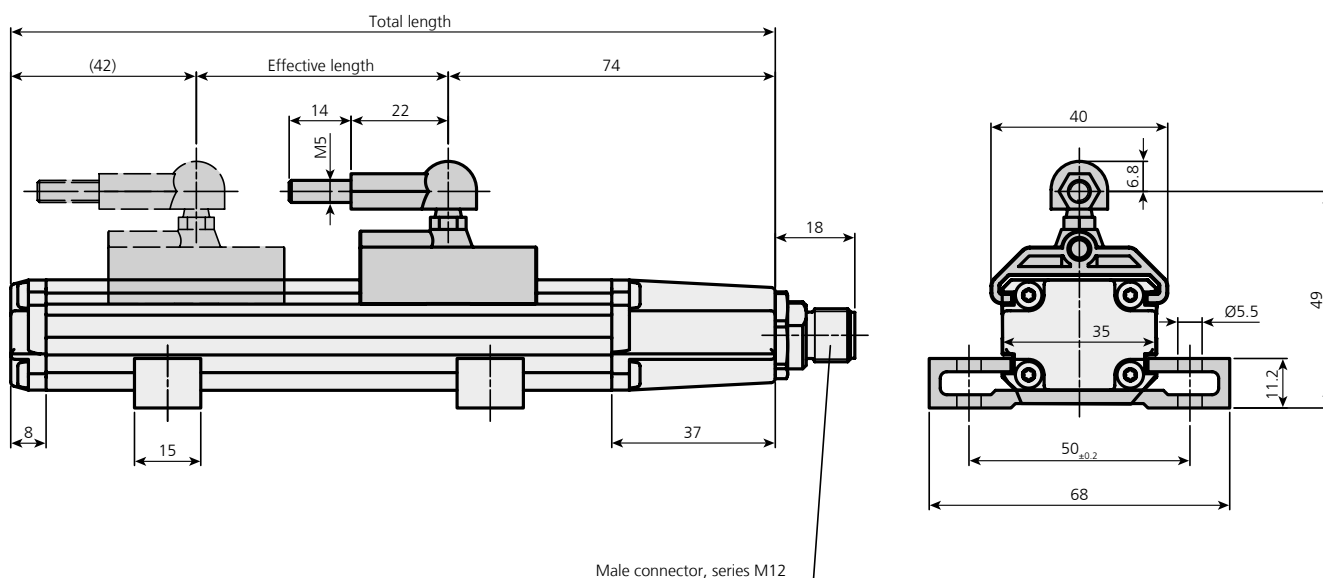

Please ask for specific drawing for your construction work.
Gray: Not included, please order separately.


Interfaces and Options

Analog	
Output range	mechanic measurement length, scaled to 0 ... 10 V, 4 ... 20 mA
Scaling?	yes, via set input
Connection	M12 × 4 pin
SSI	
Output	absolute position, up to 24 bit
Parameterization	yes, with Software TR-Winprog
Connection	M12 × 8 pin
IO-Link	
Output	Position, speed of max 3 magnets, internal temperature, operation hours counter (resolution: 0,1 h)
Parameterization	yes, with IO-Link configuration tool
Connection	M12 × 4 pin
CANopen	
Output	Position, speed of up to 3 magnets
Parameterization	yes, with CANopen configuration tool
Connection	M12 × 4 pin

How to order: mandatory and optional accessories

specify your measurement system	
interface, choose 1 out of	Analog U, Analog I, SSI, CANopen, IO-Link
housing, choose 1 out of	tube, profile
measurement range	50 ... 3,000 mm in steps
mandatory parts, please include with your order	
magnet	for different types, see following pages
	all specified data for measurement systems require the use of magnets provided by TR that are compatible with this measurement system
optional accessories, has to be ordered separately	
suitable for profile housing	clamping brackets/double clamping
	see following pages for different types

Measurement ranges, damping and dead zones

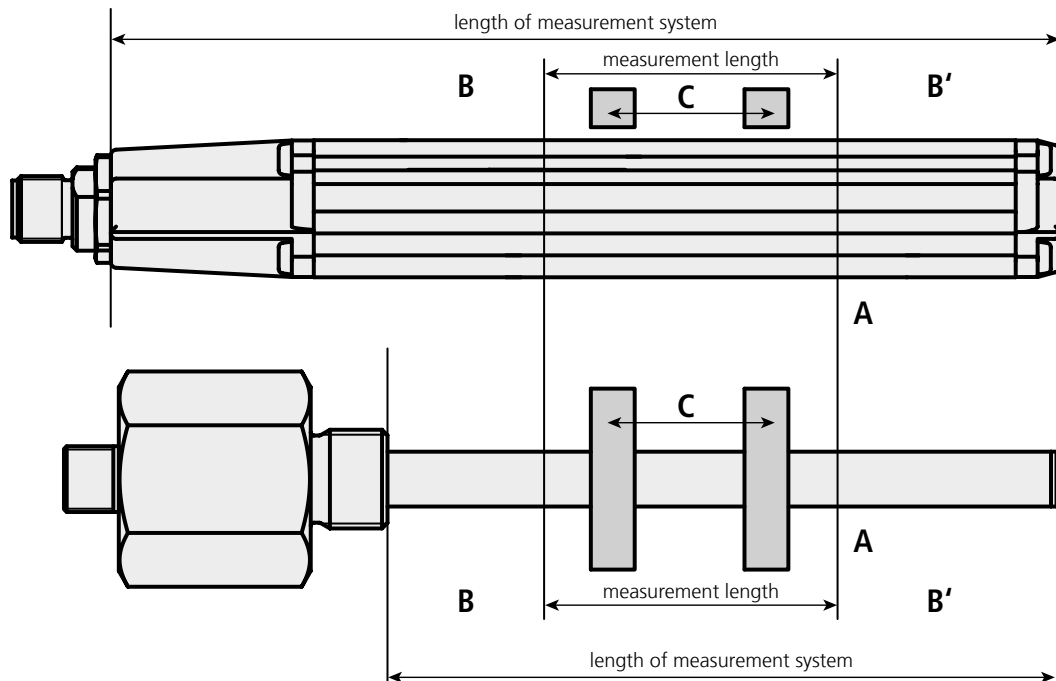

A: zone with limited resolution and reproducibility 5 mm

B, B': dead zones, see drawings

C: minimal distance between 2 magnets, reference is center of magnet.

LM_S 34





Interface	Signal, when magnet is lifted off or in Range B/B' *	Measurement length	C [mm]
Analog U	10 V	0 ... 10 V, scaling via set input	-
Analog I	20 mA	4 ... 20 mA, scaling via set input	-
SSI	0xFF	24 bit, scaling per software	-
IO-Link	0x7FFFFFFF, reset status bit „Process data valid“ acc. to IO-Link specifications	24 bit, scaling setup via bus up to 3 magnets	80 mm
CANopen	0xFF Emergency Telegramm according CANopen specifications	24 bit, scaling setup via bus, up to 3 magnets	80 mm





*valid as well for multi magnet systems in case the recognized number of magnets differs from parametrized number of magnets, resp. if magnets are too close together and thus are detected as one single magnet.

- _ Block magnets
- _ Open ring magnets
- _ Ball-joint arms
- _ Double clamping

*When inquiring about suitable accessories, please always specify the encoder.

www.tr-electronic.com

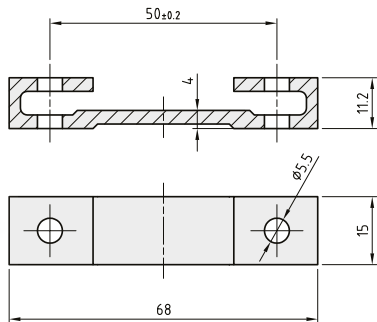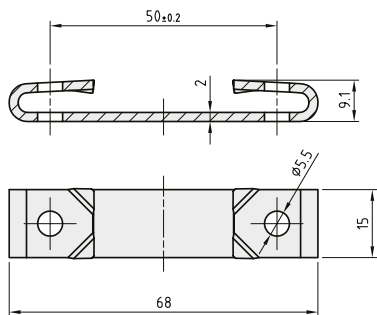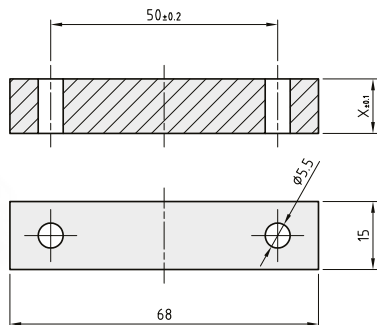Type	Order number	Product	Scale drawing
Double clamping – aluminium for LMPS34	single part: 49917001 2 clamps, 4 screws M5 × 20 as set: 85917002		
Double clamping – stainless steel, for vertical assembly for LMPS34	49917057		
Distance mounting bracket for double clamping bracket	49917081 (X=05 mm) 49917082 (X=10 mm) 49917083 (X=12 mm)		
Ring magnet 20 mm T4M20 for LMRS34	49155026		

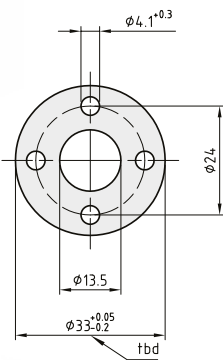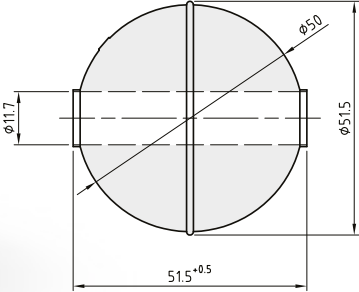Type	Order number	Product	Scale drawing
Ring magnet 22 mm T4M22 for LMR S 34	49155005		
Ring magnet 33 mm T4M33 for LMR S 34	49155016		
Float K4-M51 for LMR S 34	49915080		
Open ring magnet T4U3820 for LMR S 34	49155003		

Further accessories can be found in our main TR-catalog.

TR-Electronic – your partner in automation

Rotary encoders

Absolute encoder, incremental rotary encoder, wire-actuated encoder

Rotary encoders with optical and magnetic scanning function register the precise position in a wide variety of applications and industries. In medical engineering, miniature versions ensure correct positioning while SIL3-approved absolute rotary encoders provide the necessary safety. We offer not only high-quality rotary encoders (from Ø 22 to 160 mm) for almost any application but also comprehensive accessories.

Linear encoders

Linear absolute measuring systems, laser displacement measurement

Linear encoders register linear motions in machines, tools and systems according to specific requirements using different technologies. Linear encoders allow measuring distances of max. 20 m almost without any wear. This value is max. 240 m for laser measuring systems. Machines and systems can be precisely controlled to reach their desired positions.

Motion

Compact actuating and positioning drives

Intelligent encoTRive drives are available with the current field bus systems, such as PROFIBUS, PROFINET and CANopen, within a power range of up to 400 watts. The drives are configured to meet customer requirements and can be freely combined with gear and holding brake. Values of up to 4,350 rpm and powerful 200 Nm are available to cope with demanding applications.



Components

**Industrial PC, field bus I/O,
PLC, HMI controller**

Industrial PCs are available in numerous variants and offer customized calculation power for PC-assisted automation. Programmable logic controllers (PLC) are the traditional means for automation. HMI controllers establish the interface to the user. Field bus nodes, I/O modules and cam controllers complete the range of automation components.

Automation

**Consulting and implementation
for new machines and retrofit**

You want to set up a largely automated new machine or retrofit and modernize your existing machine with automation systems? Then you just need our extensive expert knowledge and the more than 20 years of our experience.

Unidor

**Blanking and forming,
systems, controls and sensors**

Trendsetting blanking and forming technology for more than 30 years. We are your reliable partner in the world of blanking and pressing and can prove this with thousands of machines which we have successfully installed all over the world. Sensors, controls and systems ensure optimal results in machines, tools and retrofit projects.



Headquarters

TR-Electronic GmbH
Eglishalde 6
D-78647 Trossingen
Germany
Tel.: +49/7425 228-0
Fax: +49/7425 228-33
info@tr-electronic.de
www.tr-electronic.de

Belgium

TR-Electronic Benelux
Dorpstraat 18C
NL-5386AM Geffen
Tel.: +31/73 844 9600
Mobil: +31/6383 28 303
rene.verbruggen@tr-electronic.nl
www.tr-electronic.nl

Czech Republic, Slovakia

DEL a.s.
Biskupský dvůr 1146/7
Nové Město
CZ-110 00 Praha 1
Tel.: +420/566 657 100
Fax: +420/566 621 657
tr-electronic@del.cz
www.del.cz

Great Britain

TR-Electronic Ltd.
4 William House, Old St.
Michaels Drive
GB-Braintree Essex CM7 2AA
Tel.: +44/1 371-876 187
Fax: +44/1 371-876 287
info@tr-electronic.co.uk
www.tr-electronic.co.uk

International

Argentina

AEA Aparatos Eléctricos
Automáticos S.A.C.I.E.
Asunción 2130
AR-1419 Buenos Aires
Tel.: +54/11 - 4574 1155
Fax: +54/11 - 4574 2400
servicioalcliente@aea.com.ar
www.aea.com.ar

Brazil

Grupo C+Tecnologia
Rua dos Caetés 601
CEP - 05419-000
BR-Perdizes - São Paulo - SP
Tel.: +55/11-2168 655-4
Fax: +55/11-2168 655-5
info@autron.com.br
www.autron.com.br

Denmark

TR-Electronic Danmark ApS
Skærvegyden 7
DK-8723 Løsning
Tel.: +45/75 89 06 03
cbj@tr-electronic.dk
www.tr-electronic.dk

India

Spohn Burkhardt India
9th Main Road, 500,
33rd A Cross Road
7th Cross, 4th Block Jayanagar
IN-Bangaluru - 560 011, India
Mobile: +91/98451 46948
info@spobu-india.in
www.spobu-india.in

Australia (New Zealand)

Sensor Measurement
Unit 8/26 Shields Crescent
P.O. Box 1079
AU-Booragoon
Western Australia 6154
Tel.: +61/8-93 17 25 52
Fax: +61/8-93 17 24 52
sales@sensormeasurement.com.au
www.sensormeasurement.com.au

Canada

TR Electronic
P.O. Box 2543, Station B
CA-London
Ontario Canada N6A 4G9
Tel.: +1/519-452 1999
Fax: +1/519-452 1177
customercare@trelectronic.com
www.trelectronic.com

Finland

Sarlin Oy Ab
P.O. Box 750
FI-00101 Helsinki
Tel.: +358/10 - 550 4000
Fax: +358/10 - 550 4201
asiakaspalvelu@sarlin.com
www.sarlin.com

Israel

Dor Drives Systems 2020 Ltd.
6 Granite St.
IL-4951405 Petah Tikva
Tel.: +972/3 900 75 95
Fax: +972/3 900 75 99
info@doreng.co.il
www.doreng.co.il

Australia

Leuze electronic PTY Ltd.
Unit 2/843 Mountain Highway
Bayswater VIC 3153
Tel.: +61/1300 538 933
Fax: +61/3 9738 2677
sales@leuze.com.au
www.leuze.com.au

Chile

Allware
Casa Haverbeck
General Lagos 2060 2º Piso
Region de Los Rios Valdivia
CHL-Santiago Chile
Tel.: +56 63/239298
Sales@allware.cl
www.allware.cl

Finland

TR Electronic Oy
Jaakonkatu 2
FI-01620 Vantaa
Tel.: +358/40 759 1853
info@trelectronic.fi
info@trelectronic.fi

Italy

Telestar S.r.l.
Via Novara, 35
IT-28010 Vaprio D'Agogna (NO)
Tel.: +39/03-21 966-768
Fax: +39/03-21 966-281
telestar@telestar-automation.it
www.telestar-automation.it

Austria

TR-Electronic GmbH
Tragösserstraße 117
A-8600 Bruck/Mur
Tel.: +43/3862-55006 0
Fax: +43/3862-55006 33
info@tr-electronic.at
www.tr-electronic.at

China

TR-Electronic (Beijing) CO., Ltd.
Building G3, Baiyiwen Park,
Jiu Xian Qiao Nan Road No. 9
Chaoyang District
CN-100027 Beijing, P.R. China
Tel.: +86/10 - 582 386 55
Fax: +86/10 - 582 372 10
lu.yu@tr-electronic.de
www.tr-electronic.com.cn

France

TR-Electronic France SARL
1 Avenue
Christian Doppler - Bat 2
FR-77700 Serris
Tel.: +33/1-64 63 68 68
Fax: +33/1-61 10 17 66
info@tr-electronic.fr
www.tr-electronic.fr

Japan

SANTEST CO. Ltd.
1-60 Tsuneyoshi, 1-Chome
Konohanaku
J-Osaka 554-8691
Tel.: +81/6-6465 5561
Fax: +81/6-6465 5921
info@santest.co.jp
www.santest.co.jp

Mexico

TR Electronic
P.O. Box 2543, Station B
CA-London, Ontario Canada
N6A 4G9
Tel.: +1/519-452 1999
Fax: +1/519-452 1177
customer@trelectronic.com
www.trelectronic.com

Republic of Korea

MS Intech Co., Ltd.
B-306 SK Twintech Tower
345-9 Gasan-dong/
Geumcheon-gu
KR-08589 Seoul
Tel.: +82/2-334 0577
Fax: +82/2-862 1591
sales@msintech.com
www.msintech.com

South Africa

Angstrom Group (Pty) Ltd.
Sybrand van Niekerk
Business Park Meyerton
19 Tom Muller Road
ZA-1960 Meyerton
Tel.: +27/362 0300
info@angstromeng.co.za
www.angstromgroup.co.za

Thailand

T+R Electronic (Thailand) Co., Ltd.
120/62 Moo 8 Bang Sare
TH-Sattahip, Chonburi 20250
Tel.: +66/38 737 487
Fax: +66/38 737 171
trthailand@trelectronic.co.th
www.trelectronic.co.th

Netherlands

TR-Electronic Benelux
Dorpstraat 18C
NL-5386AM Geffen
Tel.: +31/73 844 9600
Mobil: +31/6383 28 303
rene.verbruggen@tr-electronic.nl
www.tr-electronic.nl

Russia

Sensotek LLC
Kievskoye highway 22 km
(Moskovskiy settlement)
housing estate 4, building 5,
office 505E
RU-108811 Moscow
Tel.: +7/495 181-56-67
Fax: +7/495 181-56-67
info@sensotek.ru
www.sensotek.ru

Spain, Portugal

Intertronic Internacional, SL
C/Johannes Gutenberg, 4 y 6
Parque Tecnológico Paterna
ES-46980 Valencia
Tel.: +34/963 758 050
Fax: +34/963 751 022
info@intertronic.es
www.intertronic.es

Turkey

ÜNİVERSA İÇ ve DIŞ TİC. MAK.
SAN. LTD. ŞTİ.
Cemal Gürsel Caddesi No: 11/7
TR-35600 Karşıyaka-İZMİR
Tel.: +90/232 382 23 14
Fax: +90/232 382 23 24
info@universa.com.tr
www.universa.com.tr

Norway

TR Electronic Sweden AB
Djupdalsvägen 10
SE-192 51 Sollentuna
Tel.: +46/8-756 72 20
Fax: +46/8-756 76-80
info@trelectronic.se
www.trelectronic.se

Saudi-Arabia

Business Tribune Company Ltd.
4237 Ad Danah
King Abdulaziz Road
SA-32437-6887 Ad Dammam
Tel.: +966/3-832 72-17
Fax: +966/3-832 72-41
waleed@btc-ksa.com
www.btc-ksa.com

Sweden

TR Electronic Sweden AB
Djupdalsvägen 10
SE-192 51 Sollentuna
Tel.: +46/8-756 72 20
Fax: +46/8-756 76-80
info@trelectronic.se
www.trelectronic.se

USA (TR-Electronic)

TR Electronic
200 East Big Beaver Road
Suite 164
US-Troy, MI 48083
Tel.: +1/248-244-2280
Fax: +1/248-244-2283
customer@trelectronic.com
www.trelectronic.com

Peru

Grupo C+Tecnologia
Rua dos Caetés 601
CEP-05419-000
BR-Perdizes - São Paulo - SP
Tel.: +55/11-2168 6554
Fax: +55/11-2168 6555
info@autron.com.br
www.autron.com.br

Singapore

Globaltec Electronics
(Far East) Pte. Ltd.
50 Bukit Batok Street 23
#06-27 Midview Building
SG-659578 Singapore
Tel.: +65/6267 9188
Fax: +65/6267 8011
janice@globaltec.com.sg
www.globaltec.com.sg

Switzerland

TR-Electronic SA
14, Ch. Pré-Fleuri
CH-1228 Plan-les-Ouates/Genève
Tel.: +41/22-7 94 21 50
Fax: +41/22-7 94 21 71
info@tr-electronic.ch
www.tr-electronic.ch

USA (TRsystems)

TRS Fieldbus Systems, Inc.
666 Baldwin Court
US-Birmingham, MI 48009
Tel.: +1/586 826-9696
Fax: +1/586 826-9697
support@trs-fieldbus.com
www.trs-fieldbus.com

Poland

Stoltronic-Polska Sp.z o.o. Sp.k.
Ul. Papiernicza 7e,
P - 92-312 Łódź
Tel.: +48/42 649 12 15
Fax: +48/42 649 11 08
stoltronic@stoltronic.pl
www.stoltronic.pl

Slovenia

S.M.M. d.o.o.
Jaskova 18
SI-2001 Maribor
Tel.: +386/2450 2300
Fax: +386/2450 2302
info@smm.si
www.smm.si

Taiwan


TR-Electronic (Beijing) CO., LTD.
Room 717 / 718, Building A2
Electronic City Science Park
Jiu Xian Qiao Dong Road No. 9
Chaoyang District
CN-100027 Beijing, P.R. China
Tel.: +86/10 - 582 386 55
Fax: +86/10 - 582 372 10
lu.yu@tr-electronic.de
www.tr-electronic.com.cn

TR-Electronic GmbH

Eglishalde 6
D - 78647 Trossingen

Tel. +49 7425 228-0
Fax +49 7425 228-33

info@tr-electronic.de
www.tr-electronic.de

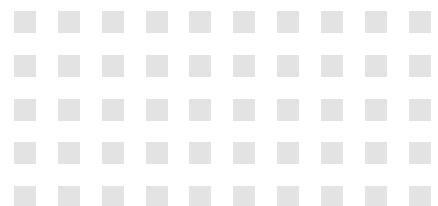

Last update: 06/2023

68-105-130 · TR-V-PR-GB-0036-01

Subject to technology and design modifications.

Cover photo background: ©kras99-fotolia.com